

Medium

RUSH S3

###

#####. ### ##, ###, ####,
#####.

## ##	#### ## ##
## ##	##
###	SJ # ##
##	##
###	PU / PU
Top	##
#####	S3 / SR, SC, CI, FO
## ##	EU 36-48 / UK 3.5-13.0 / US 4.0-13.5 JPN 22.5-31.5 / KOR 235-315
## ##	0.712 kg
###	EN ISO 20345:2022+A1:2024 ASTM F2413:2024







SND



BRN

CAM

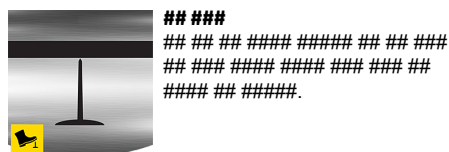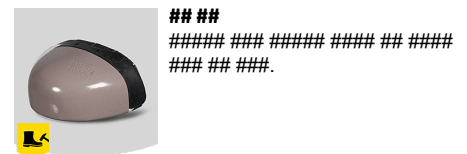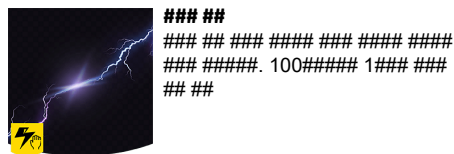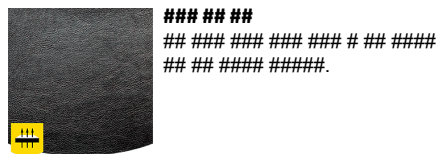

##:
###, ##, ##, ##, ###, ## # ##, ##

##:
##, ### ## ##, ##

##:
#####. ### ##### ## ##### ## ##.

	##	## ##	##	EN ISO 20345
## ##	#### ## ##			
	##: ### ##	mg/cm²/h	7.8	≥ 0.8
	##: ### ##	mg/cm²	68	≥ 15
## ##	##			
	##: ### ##	mg/cm²/h	46.42	≥ 2
	##: ### ##	mg/cm²	372	≥ 20
###	SJ # ##			
	###: #####(##/##)(###)	##	25600/12800	25600/12800
###	PU / PU			
	### #####(## ##)	mm³	88	≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.38	≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.45	≥ 0.36
	SR ## ## - ## + ##### - ##### ## ##	##	0.34	≥ 0.19
	SR ## ## - ## + ##### - ## ## ##	##	0.31	≥ 0.22
	### ## #	###	21.7	0.1 - 1000
	ESD #	###	N/A	0.1 - 100
	#### ## ##	J	28	≥ 20
Top	##			
	#### ## # (## # ##### 100J)	mm	N/A	N/A
	#### ## # (## # ## ## 10kN)	mm	N/A	N/A
	#### ## # (## # ## ## 200J)	mm	17.5	≥ 14
	#### ## # (## # ## ## 15kN)	mm	21.5	≥ 14

##:
##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ## ## ##### ##### ## # #####.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com